


TECHNICAL DATA SHEET

CERAMIC INSULATION TAPE

Ceramic TCW tape is woven from high-quality ceramic yarns without reinforcement. Depending on the thickness, a single or multi-layered weave is used. Alternatively, the tape may be equipped with a self-adhesive layer (types marked with the letter "P"). The product contains approximately 18% organic fibres, which may burn out during the first period of use without any loss of key performance parameters.

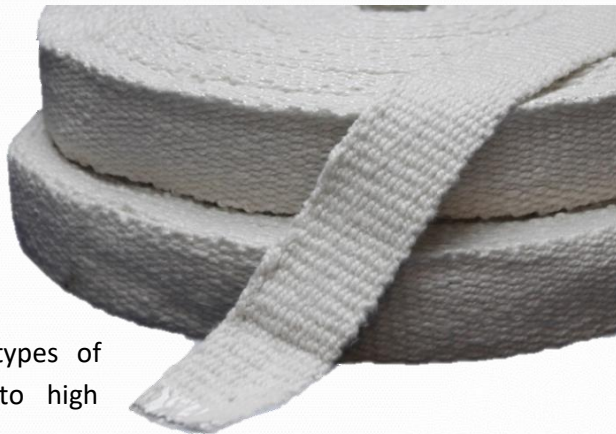

Insulation tapes are used as thermal insulation for all types of machinery, equipment and facilities that are exposed to high temperatures and where we want to reduce the heat flow.

They are especially often used as thermal shields, insulation in the process of heating welded structures or shielding of hoses or cables working close to heat sources.

TYPE			TCW, TCW/P
Raw material			ceramic yarn
Maximum peak temperature		°C	800
Maximum continuous operating temperature		°C	650
Type of reinforcement			-
Weave			cloth, single or multiple layers
Maximum loss after ignition		%	18
Maximum shrinkage		%	3
Density		g/cm ³	0,5 +/- 15%
Colour			white
Dimensional range	Width	mm	8 - 500
	Thickness	mm	2 - 10

** This data sheet is confidential. Transmitting, copying and disclosing it to third parties requires the written consent of PRO-HURT. The present data sheet is directed at the addressee(s) referred to above and is the property of the addressee. Disclosure of the card is prohibited. If you are not the intended addressee, you must delete this document immediately and notify the sender by phone or email.*